

# ZASILACZ LED ZNS-12-12, ZNS-20-12, ZNS-30-12, ZNS-50-12, ZNS-75-12


# ledix

ZAMEL Sp. z o.o.

ul. Zielona 27, 43-200 Pszczyna, Poland  
 Tel. +48 (32) 210 46 65, Fax +48 (32) 210 80 04  
[www.zamel.com](http://www.zamel.com), e-mail: [marketing@zamel.pl](mailto:marketing@zamel.pl)

# zamel

## OPIS

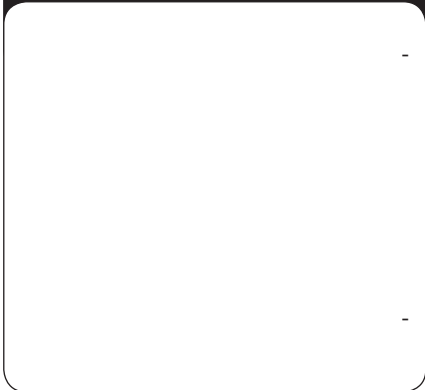

## CECHY



## DANE TECHNICZNE

	ZNS-12-12	ZNS-20-12	ZNS-30-12	ZNS-50-12	ZNS-75-12
<b>Parametry wejściowe</b>					
	50 / 60 Hz				
	0,13 A	0,21 A	0,18 A	0,30 A	0,45 A
	~0,5 W				
	78 %	82 %	88 %	88 %	86 %
	0,5				
<b>Parametry wyjściowe</b>					
	1,0 A	1,67 A	2,5 A	4,10 A	6,25 A
	12 W	20 W	30 W	50 W	75 W
	5 %				
Czas ustalania (max):	500 ms				
<b>Pozostałe parametry</b>					
Zabezpieczenie	Tak				
Zabezpieczenie					
Zabezpieczenie termiczne:	Nie				
	Tak				
Temperatura pracy:	-20 ÷ 50°C	-20 ÷ 40°C	-20 ÷ 50°C		
	II				
Kategoria	II				
	IP20				
Wymiary [mm]:	128x50x13		155x53x16	184x64x32	
Waga:	70 g	75 g	105 g	270 g	270 g
	PN-EN 61204-3, PN-EN 55022, PN-EN 61000				

## MONTAŻ


-  
-  
-  
-

## SCHEMAT

## WYMIARY OBUDOWY

## RODZINA PRODUKTU

## KARTA GWARANCYJNA

Pieczęć i podpis sprzedawcy, data sprzedaży  sprzedanej.